

FORM PTO-1390 (Modified)  
(REV 11-2000)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

**TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371**

3177-69131

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

**10/009787**

INTERNATIONAL APPLICATION NO.  
**PCT/US00/15178**

INTERNATIONAL FILING DATE  
**01 June 2000 (01.06.00)**

PRIORITY DATE CLAIMED  
**01 June 1999 (01.06.99)**

TITLE OF INVENTION

**WELDABLE MOUNT FOR FUEL SYSTEMS COMPONENT**

APPLICANT(S) FOR DO/EO/US

**WILLIAMSON, Nancy, et al**

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below.
4. ☐ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
  - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
  - b. ☐ has been communicated by the International Bureau.
  - c. ☒ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
  - a. ☐ is attached hereto.
  - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
  - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
  - b. ☐ have been communicated by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☒ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).
11. ☐ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☐ A copy of the International Search Report (PCT/ISA/210).

**Items 13 to 20 below concern document(s) or information included:**

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
20. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
21. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
22. ☒ Certificate of Mailing by Express Mail
23. ☐ Other items or information:

ATTORNEY'S DOCKET NUMBER

**3177-69131**

24. The following fees are submitted:.

**BASIC NATIONAL FEE ( 37 CFR 1.492 (a) (1) - (5)) :**

- |                                                                                                                                                                                                                                    |                  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| <input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO . . . . . | <b>\$1040.00</b> |
| <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO . . . . .                                                           | <b>\$890.00</b>  |
| <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO . . . . .                                                      | <b>\$740.00</b>  |
| <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) . . . . .                                                       | <b>\$710.00</b>  |
| <input checked="" type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) . . . . .                                                  | <b>\$100.00</b>  |

**ENTER APPROPRIATE BASIC FEE AMOUNT =**

**\$100.00**

Surcharge of **\$130.00** for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).

**\$0.00**

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	21 - 20 =	1	x \$18.00	\$18.00	
Independent claims	4 - 3 =	1	x \$84.00	\$84.00	

**Multiple Dependent Claims (check if applicable).**

**\$0.00**

**TOTAL OF ABOVE CALCULATIONS =**

**\$202.00**

- ☐ Applicant claims small entity status. See 37 CFR 1.27). The fees indicated above are reduced by 1/2.

**\$0.00**

**SUBTOTAL =**

**\$202.00**

Processing fee of **\$130.00** for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).

**\$0.00**

**TOTAL NATIONAL FEE** =

**\$202.00**

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable).

**\$0.00**

TOTAL FEES ENCLOSED =

**\$202.00**

Amount to be: refunded	\$
charged	\$

- a. ☒ A check in the amount of \$202.00 to cover the above fees is enclosed.
- b. ☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \_\_\_\_\_ to cover the above fees.  
A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 10-0435. A duplicate copy of this sheet is enclosed.
- d. ☐ Fees are to be charged to a credit card. **WARNING: Information on this form may become public. Credit card information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

**NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.**

**SEND ALL CORRESPONDENCE TO:**

**RICHARD A. REZEK, ESQ.**  
**BARNES & THORNBURG**  
**11 SOUTH MERIDIAN STREET**  
**INDIANAPOLIS, IN 46204**

SIGNATURE

**Richard A. Rezek**

NAME \_\_\_\_\_

**30,796**

REGISTRATION NUMBER

**12 November 2001 (12.11.01)**

DATE \_\_\_\_\_

With the entry of the foregoing amendment, the application is believed to be

in condition for examination and allowance. Consideration of the claims, leading to their allowance and passage of the application to issuance, is respectfully requested.

Respectfully submitted,

A handwritten signature in black ink, reading "Richard A. Rezek". The signature is written in a cursive style with a long, sweeping horizontal line at the end.

Richard A. Rezek  
Atty. Reg. No. 30,796  
Attorney for Applicants

RAR/hzs/409499  
Indianapolis, Indiana 46204  
(317) 231-7283

## CLAIMS

1. Please cancel claim without prejudice.
2. Please cancel claim without prejudice.
3. Please cancel claim without prejudice.
4. Please cancel claim without prejudice.
5. Please cancel claim without prejudice.
6. Please cancel claim without prejudice.
7. Please cancel claim without prejudice.
8. Please cancel claim without prejudice.
9. Please cancel claim without prejudice.
10. Please cancel claim without prejudice.
11. Please cancel claim without prejudice.
12. Please cancel claim without prejudice.
13. A vent apparatus adapted to be coupled to a vehicle fuel tank, the

apparatus comprising

a valve housing made from a non-weldable plastics material and formed to include a cylindrical sleeve defining an interior region, a top wall coupled to the cylindrical sleeve and formed to include an aperture and an annular flange defining an annular channel, and a venting outlet coupled to the top wall at the aperture and provided to conduct fuel and fuel vapor from the interior region of the cylindrical sleeve to another destination outside the valve housing,

a valve positioned to lie within the interior region of the cylindrical sleeve and formed to move within the interior region of the cylindrical sleeve to open and close the aperture defined by the top wall of the valve housing which leads to the venting outlet, and

a tank mount made from a weldable plastics material, coupled to the top wall of the valve housing, and formed to include an outer rim adapted to be coupled to the fuel tank to support the cylindrical sleeve within the tank, an annular rib formed to be received within the annular channel of the flange of the top wall, and a top wall coupled to and

positioned to lie between the outer rim and the annular rib, the tank mount being positioned to cause the top wall of the tank mount and the top wall of the valve housing to lie in coplanar relation with one another.

14. The apparatus of claim 13, wherein the tank mount is ring-shaped and is further formed to include an annular interior wall defining an opening formed to receive the top wall of the valve housing, and the annular inner rib of the tank mount is coupled to the annular interior wall and is formed to extend into the opening.

15. The apparatus of claim 14, wherein the interior wall of the tank mount includes an upper face and a lower face and the annular inner rib is positioned to lie midway between the upper face and the lower face.

16. The apparatus of claim 14, wherein the top wall of the tank mount is positioned to extend radially outwardly from the interior wall and the outer rim of the tank mount is coupled to the top wall of the tank mount, formed to extend radially downwardly from the top wall of the tank mount, and formed to include a bottom face adapted to be coupled to the fuel tank.

17. The apparatus of claim 14, wherein the inner rib is formed to define a notch and the flange of the valve housing is formed to include a locator tab to be received within the notch in order to prevent rotation between the tank mount and the valve housing.

18. The apparatus of claim 13, wherein the venting outlet of the valve housing is positioned to lie above the tank mount and the cylindrical sleeve of the valve housing is positioned to lie below the tank mount.

19. The apparatus of claim 13, wherein the top wall of the tank mount further includes a top surface and a bottom surface and the outer rim of the tank mount includes an outer surface and an inner surface, and wherein the top surface of the top wall has a length,  $X$ , and the outer surface of the outer rim has a height,  $Y$ , and further wherein  $X$  is greater than  $Y$ .

20. A vent apparatus adapted to be coupled to a fuel tank, the apparatus comprising

a valve housing formed to include a cylindrical sleeve defining an interior region, a top wall coupled to the cylindrical sleeve and formed to include an aperture and an annular flange defining an annular channel, and a venting outlet coupled to the top wall at the aperture in order to conduct fuel and fuel vapor from the interior region of the cylindrical sleeve to another destination outside the valve housing,

a valve positioned to lie within the interior region of the cylindrical sleeve and formed to move within the interior region of the cylindrical sleeve to open and close the aperture defined by the top wall of the valve housing, and

a tank mount coupled to the top wall of the valve housing and formed to include an outer rim adapted to be coupled to the fuel tank to support the cylindrical sleeve within a mounting aperture of the tank and an annular rib formed to be received within the annular channel of the flange, and wherein the valve housing includes a locator tab coupled to the annular flange and the annular rib includes a notch formed to receive the locator tab of the valve housing in order to prevent rotation between the valve housing and the tank mount.

21. The apparatus of claim 20, wherein the tank mount includes a top wall and the venting outlet of the valve housing is positioned to lie above the top wall of the tank mount and the cylindrical sleeve of the valve housing is positioned to lie below the top wall of the tank mount.

22. The apparatus of claim 21, wherein the tank mount further includes an interior wall defining an opening for receiving the top wall of the valve housing therein and the inner rib of the tank mount is coupled to the interior wall and positioned to extend into the opening of the tank mount, and wherein the tank mount further includes a top wall positioned to extend radially outwardly from the interior wall, and the outer rim is coupled to the top wall and is positioned to extend radially downwardly from the top wall.

23. The apparatus of claim 21, wherein the valve housing is made from a non-weldable plastics material and the tank mount is made from a weldable plastics material

and the inner rib of the tank mount is received within the channel of the flange of the top wall of the valve housing to cause the tank mount to be mechanically coupled to the valve housing.

24. A vent apparatus adapted to be coupled to a fuel tank, the apparatus comprising

a valve housing made from a non-weldable plastics material and formed to include a cylindrical sleeve defining an interior region, a top wall coupled to the cylindrical sleeve and formed to include an aperture and an annular flange having an interior opening forming a channel adapted to face the fuel tank, and a venting outlet coupled to the top wall at the aperture and provided to conduct fuel and fuel vapor from the interior region of the cylindrical sleeve to another destination outside the valve housing,

a valve positioned to lie within the interior region of the cylindrical sleeve and formed to move within the interior region of the cylindrical sleeve to open and close the aperture defined by the top wall of the valve housing which leads to the venting outlet, and

a tank mount made from a weldable plastics material and formed to be received within the channel of the flange of the top wall of the valve housing to cause the flange to completely surround the tank mount, the tank mount having a bottom surface adapted to be weldably coupled to the fuel tank in order to support the valve housing within a mounting aperture formed in the fuel tank.

25. The apparatus of claim 24, wherein the tank mount forms a T-shaped cross section and the channel of the flange of the valve housing is similarly formed to define a T-shaped cross-section.

26. The apparatus of claim 25, wherein the tank mount includes a horizontal portion and a vertical portion coupled to the horizontal portion at a first end and adapted to be weldably coupled to the fuel tank at a second end defining the bottom surface.

27. The apparatus of claim 25, wherein the tank mount is further formed to define a notch and the flange of the valve housing includes a locator tab formed to be received within the notch of the tank mount in order to prevent rotation between the tank mount and the valve housing.



28. The apparatus of claim 24, wherein the annular flange of the valve housing is formed to include a top wall coupled to the top wall of the valve housing, opposite side walls positioned to lie in spaced-apart relation to each other, and a tab portion coupled to each side wall in order to define the T-shaped channel.

29. A vent apparatus adapted to be coupled to a fuel tank, the apparatus comprising

a valve housing made from a non-weldable plastics material and formed to include a cylindrical sleeve defining an interior region, a top wall coupled to the cylindrical sleeve and formed to include an aperture and an annular flange having an interior opening forming a channel adapted to face the fuel tank, and a venting outlet coupled to the top wall at the aperture and provided to conduct fuel and fuel vapor from the interior region of the cylindrical sleeve to another destination outside the valve housing,

a valve positioned to lie within the interior region of the cylindrical sleeve and formed to move within the interior region of the cylindrical sleeve to open and close the aperture defined by the top wall of the valve housing which leads to the venting outlet, and

a tank mount made from a weldable plastics material, formed to include a T-shaped portion formed to be received within the channel of the flange of the top wall of the valve housing to cause the flange to completely surround the T-shaped portion and a base portion coupled to the T-shaped portion and adapted to be weldably coupled to the fuel tank in order to support the valve housing within a mounting aperture of the fuel tank.

30. The apparatus of claim 29, wherein the flange of the valve housing is formed to include a locator tab and the T-shaped portion of the tank mount is formed to define a notch formed to receive the locator tab therein to prevent rotation of the tank mount relative to the valve housing.

31. The apparatus of claim 29, wherein the T-shaped portion is formed to include a horizontal portion and a vertical portion coupled to the horizontal portion at a first end and coupled to the base portion at a second end, and the base portion is formed to include a top surface coupled to the vertical portion, an interior surface, and exterior surface, and a bottom surface adapted to be coupled to the fuel tank.

3177-69131

- 19 -

32. The apparatus of claim 31, wherein the flange is formed to include an outer side wall and the outer side wall is positioned to lie in coplanar relation with the exterior surface of the base portion of the tank mount.

33. The apparatus of claim 31, wherein the annular flange of the valve housing is formed to include a top wall coupled to the top wall of the valve housing, opposite side walls positioned to lie in spaced-apart relation to each other, and a tab portion coupled to each side wall in order to define the T-shaped channel.

34. Please cancel claim without prejudice.

## Background and Summary of the Invention

30 A spring-loaded valve is positioned to move up and down in a valve chamber formed in the valve housing to open and close an aperture formed in a top wall of the valve housing and arranged to provide an opening into the valve housing

venting outlet above the tank mount. The tank mount is positioned to cause a top wall of the tank mount to lie in coplanar relation with the top wall of the valve housing.

Additional features of the present invention will become apparent to those skilled in the art upon consideration of the following description of preferred  
5 embodiments of the invention exemplifying the best mode of carrying out the invention as presently perceived.

### Brief Description of the Drawings

The detailed description particularly refers to the accompanying figures  
10 in which:

Fig. 1 is a perspective view of a weldable ring-shaped tank mount formed to include a circular opening and a valve housing made of a non-weldable material and formed to include a circular top wall positioned to lie in the circular opening formed in the ring-shaped tank mount, a tank venting outlet coupled to and  
15 positioned to lie above the top wall, and a cylindrical sleeve coupled to and positioned to lie below the top wall and formed to include a valve chamber therein sized to receive a valve as shown in Fig. 2;

Fig. 2 is a sectional view taken along line 2-2 of Fig. 1 showing the ring-shaped tank mount welded to a fuel tank made of a weldable plastics material so  
20 that the valve housing is positioned to lie within a mounting aperture formed in a top wall of the fuel tank and also showing the "L-shaped" cross section of the ring-shaped tank mount and a spring-loaded valve positioned to lie and move within the valve chamber in order to open and close the tank venting outlet;

Fig. 3 is a sectional view of a plastic injection mold having an upper  
25 mold portion and a lower mold portion, here shown spaced-apart in an opened position, and also showing the ring-shaped tank mount pre-positioned within the upper mold portion prior to injection of a non-weldable plastics material into a mold cavity formed in the upper and lower mold portions (in the manner shown in Fig. 4);

Fig. 4 is a sectional view similar to Fig. 3 showing the upper and lower  
30 mold portions in a closed position and a non-weldable plastics material used to make the valve housing having been injected into a channel formed within the lower mold portion in order to fill both the upper and lower mold portions for the purpose of

“over-molding” non-weldable plastics material onto the ring-shaped tank mount to form a valve housing coupled to the ring-shaped tank mount;

Fig. 5 is a perspective view similar to Fig. 1 showing another embodiment of a ring-shaped tank mount made of a weldable material and a valve housing supported by the ring-shaped tank mount and made of a non-weldable plastics material, and also showing a “T-shaped” cross section of the weldable ring-shaped mount and the manner in which the weldable ring-shaped tank mount is coupled to an annular flange of circular top wall of the valve housing;

Fig. 6 is a sectional view taken along line 6-6 of Fig. 5 showing the T-shaped annular tank mount welded to the fuel tank and also showing a valve positioned to lie and move within a valve chamber formed in the valve housing in order to open and close a tank venting outlet formed in the valve housing;

Fig. 7 is a sectional view of an alternate plastic injection mold showing the plastic injection mold having an upper mold portion and a lower mold portion, spaced-apart from one another and in an opened position, and also showing the T-shaped annular tank mount pre-positioned on the lower mold portion;

Fig. 8 is a sectional view similar to Fig. 7 showing the upper and lower mold portions in a closed position to allow the non-weldable plastic to be injected through a channel into the lower mold portion in order to fill a mold cavity established in the upper and the lower mold portions in order to “over-mold” the T-shaped weldable tank mount with the non-weldable plastic, which forms the valve housing;

Fig. 9 is a perspective view similar to Figs. 1 and 5 showing another embodiment of a valve assembly including a ring-shaped tank mount made of a weldable plastics material and a valve housing supported by the ring-shaped tank mount and made of a non-weldable plastics material;

Fig. 10 is a sectional view taken along line 10-10 of Fig. 9 showing a somewhat “J-shaped” cross section of the ring-shaped tank mount that is welded to the fuel tank and a valve that is positioned to lie and move in a valve chamber formed in the valve housing in order to open and close a tank venting outlet formed in the valve housing;

Fig. 11 is a is a sectional view of an alternate plastic injection mold showing the plastic injection mold having an upper mold portion and a lower mold

portion, spaced-apart from one another and in an opened position, and also showing the J-shaped annular tank mount pre-positioned on the lower mold portion;

Fig. 12 is a sectional view similar to Fig. 11 showing the upper and lower mold portions in a closed position to allow the non-weldable plastic to be injected through a channel into the lower mold portion in order to fill a mold cavity established in the upper and the lower mold portions in order to over-mold the J-shaped weldable tank mount with the non-weldable plastic, which forms the valve housing;

Fig. 13 is a sectional view showing a tank mount mold including an annular tank mount mold cavity having an L-shaped cross section in order to form the tank mount shown in Figs. 1 and 2;

Fig. 14 is a sectional view similar to Fig. 13 showing an alternate tank mount mold including an annular tank mount mold cavity having a T-shaped cross section in order to form the alternate tank mount shown in Figs. 5 and 6; and

Fig. 15 is a section view similar to Figs. 12 and 13 showing another alternate tank mount mold including an annular tank mount mold cavity having a J-shaped cross section in order to form the alternate tank mount shown in Figs. 9 and 10.

#### Detailed Description of the Drawings

A vent apparatus 10 is shown in Fig. 1 and is configured to be mounted on an exterior surface 40 of a fuel tank 18. Vent apparatus 10 is formed to include a weldable tank mount 12 and a fuel systems component coupled to weldable tank mount 12. Tank mount 12 is made from a weldable plastics material and fuel systems component is made from a non-weldable plastics material. In the illustrated embodiment, the fuel systems component is a valve assembly 13 for controlling the discharge of fuel and fuel vapor from fuel tank 18. It is within the scope of this disclosure to use tank mount 12 to support other fuel system components (not shown) such as a fuel sender unit or other type of valve in fuel tank 18 or another type of tank.

Valve assembly 13 is formed to include a valve housing 14 and a spring-loaded valve 21. As mentioned above, tank mount 12 of the present invention

is made from a weldable plastics material such as high density polyethylene (HDPE) or any other suitable polymeric plastic or material. Valve housing 14 is molded from a non-weldable plastics material such as acetal, for example. Tank mount 12 is provided for supporting valve housing 14 in a mounting aperture 16 of fuel tank 18, as shown in Fig. 2.

Vent apparatus 10 is provided for mounting within fuel tank 18, as shown in Fig. 2, in order to equalize the pressure between fuel tank 18 and the atmospheric pressure. Similar to tank mount 12, fuel tank 18 is made from a weldable plastics material so that tank mount 12, also made from a weldable plastics material, and fuel tank 18 may be welded together in order to couple apparatus 10 securely with fuel tank 18. Apparatus 10 is made using an "over-mold" process in accordance with the disclosure herein wherein tank mount 12 is pre-molded and inserted into a valve housing mold or plastic injection mold 15, as shown in Figs. 3 and 4. The non-weldable plastics material, forming valve housing 14, is then injected around tank mount 12 into a valve housing mold cavity 64 formed in plastic injection mold 15 around tank mount 12. Because of the design of tank mount 12, tank mount 12 becomes mechanically coupled to valve housing 14 once the non-weldable liquid plastics material injected into mold 15 cools and sets. The process by which apparatus 10 is made will be described below in more detail.

As stated above, vent apparatus 10 is formed to include tank mount 12 and a fuel systems component herein disclosed as valve assembly 13 which includes valve housing 14 and valve 21. Valve housing 14 is molded from a non-weldable plastics material. Valve housing 14 is formed to include a circular top wall 20, a venting outlet 22 coupled to and positioned to lie above top wall 20, and a cylindrical sleeve 26 which is coupled to and positioned to lie below top wall 20, as shown in Figs. 1 and 2. Cylindrical sleeve 26 is hollow and thus defines an interior region providing a valve chamber 24, as shown in Fig. 2.

Valve 21 is positioned to lie within valve chamber 24 and operates to open and close an aperture 23 which is defined by top wall 20 and leads to venting outlet 22 for purposes of equalizing the pressure within fuel tank 18 with that of the atmospheric pressure. Fuel and fuel vapor is conducted from fuel tank 18 to valve chamber 24, through aperture 23, and out venting outlet 22 to another destination, for

example, a fuel vapor treatment canister including a carbon filter. Top wall 20 is also formed to include an annular flange 27 which defines a channel 28, as shown in Fig. 2, for receiving a portion of tank mount 12 therein.

As mentioned before, tank mount 12 is formed from a weldable plastics material such as HDPE or any other suitable polymeric plastic. Tank mount 12 is formed to include an interior wall 29 defining a passageway 30 for receiving top wall 20 of valve housing 14. Interior wall 29 includes an upper portion 44 and a lower portion 46. Tank mount 12 also includes an inner rib 32 coupled to interior wall 29, positioned to lie midway between upper portion 44 and lower portion 46, and positioned to extend into passageway 30. Inner rib 32 is formed to be received within channel 28 of flange 27 of top wall 20. Inner rib 32 includes at least one notch 34 while flange 27 includes at least one corresponding locator tab 31 received within notch 34 in order to prevent rotation between tank mount 12 and valve housing 14.

Tank mount 12 further includes a body 36 having an "L-shaped" cross section, as shown, for example, in Fig. 2, adapted to be coupled to fuel tank 18. Body 36 includes an annular arm or top wall 37 having a top surface 47 coupled to interior wall 29 and positioned to extend radially outwardly from interior wall 29 as shown in Figs. 1 and 2. Body 36 further includes an annular foot or outer rim 41 having an outer surface 49, coupled to top wall 37 and positioned to extend radially downwardly from top wall 37. Top wall 37 is therefore arranged to extend radially inwardly from outer rim 41. Outer rim 41 further includes a downwardly facing bottom surface 38 for engagement with exterior surface 40 of fuel tank 18. Top surface 47 of top wall 37 has a horizontal length X and outer surface 49 of outer rim 41 has a vertical height Y such that X is greater than Y as shown in Fig. 2. Valve assembly 13 is positioned to lie within mounting aperture 16 of fuel tank 18 in order to provide a mounting arrangement for weldably coupling tank mount 12 of apparatus 10 directly to fuel tank 18.

Tank mount 12 is molded using a tank mount mold 66, as shown in Fig. 13. Tank mount mold 66 includes upper and lower mold portions 68, 70 forming an annular tank mount mold cavity 72 having an "L-shaped" cross section. A weldable plastics material is injected into annular tank mount mold cavity 72 by a weldable



plastics material injector 74 in order to form ring-shaped tank mount 12 also having an L-shaped cross section.

Valve housing 14 is molded using plastic injection mold 15, as shown in Fig. 3. Plastic injection mold 15 includes an upper mold portion 50 and a lower mold portion 52. Upper and lower mold portions 50, 52 are movable between an opened position, as shown in Fig. 3, and a closed position, as shown in Fig. 4. Lower mold portion 52 is coupled to a plastics material injector 51 provided for injecting the liquid non-weldable plastics material such as acetal into lower mold portion 52 of plastic injection mold 15.

Upper mold portion 50 is formed to define a mount-receiving cavity 53, a top wall-forming cavity 55, and an outlet-forming cavity 57, as shown in Fig. 3. Lower mold portion 52 is formed to define a sleeve-forming cavity 58. Top wall-forming cavity 55 further includes an inner rib encapsulation portion 76 formed to surround inner rib 32 of tank mount 12 when tank mount 12 is positioned to lie in mold 15. As shown in Fig. 3, tank mount 12 is pre-molded and inserted within mount-receiving cavity 53 of upper mold portion 50 when upper and lower mold portions 50, 52 are in the opened position. Upper and lower mold portions 50, 52 are then moved to the closed position, as shown by arrows 54, to retain tank mount 12 within mold 15, as shown in Fig. 4.

Once upper mold portion 50 and lower mold portion 52 are moved to the closed position, plastic material injector 51 injects the liquid non-weldable plastics material, such as acetal, through a channel 56 formed in lower mold portion 52. The liquid injected plastics material fills sleeve-forming cavity 58 of lower mold portion 52 first and then proceeds to fill top wall-forming cavity 55 and nozzle-forming cavity 57 of upper mold portion 50. The result is that weldable tank mount 12 is over-molded onto the non-weldable liquid plastics material used to form valve housing 14.

Once the cavities formed in upper and lower mold portions 50, 52 have been filled, the non-weldable liquid plastics material in those cavities is allowed to cool. After the liquid plastics material has cooled to a solid form, a mechanical bond is established between tank mount 12 and valve housing 14 due to the structure of tank mount 12 and valve housing 14, as described previously. Once cooled, upper and lower mold portions 50, 52 are moved to the opened position and valve housing 14

and tank mount 12, which are now mechanically coupled to one another, are removed from mold 15. Venting outlet 22 is positioned to lie above tank mount 12 and cylindrical sleeve 26 is positioned to lie below tank mount 12.

Because of the use of the over-molding process disclosed herein, a larger percentage of apparatus 10 is able to be made of the non-permeable weldable material which forms tank mount 12. Therefore, the surface area of the weldable plastics material exposed to fuel from fuel tank 18 is reduced. This reduction in surface area may act to reduce the emissions given off in vehicle use. A smaller amount of weldable plastics material is needed to make mount 12 in order to couple valve assembly 13 to fuel tank 18. Further, the non-weldable plastics material used to form valve housing 14 may have a tendency to shrink after having been molded. Once valve housing 14 is injection-molded over tank mount 12, the non-weldable material of valve housing 14 will shrink around tank mount 12 in order to form a tight mechanical bond between tank mount 12 and valve housing 14.

Using the method disclosed herein, vent apparatus 10 is formed by first forming tank mount mold 66 to include annular tank mount mold cavity 72 having an L-shaped cross section. The next step is to inject a weldable plastics material into annular tank mount mold cavity 72 in order to provide ring-shaped tank mount 12. Tank mount 12 also has an L-shaped cross section including annular foot or outer rim 41 having downwardly facing bottom surface 38 adapted to be welded to exterior surface 40 of fuel tank 18, as shown in Fig. 2. The final step includes injecting the non-weldable plastics material into valve housing mold cavity 64, which contains tank mount 12, in order to over-mold tank mount 12 with the non-weldable plastics material which forms valve housing 14. Valve housing 14 is thus formed to encapsulate inner rib 32 in order to form a mechanical bond between tank mount 12 and valve housing 14.

Another embodiment is provided in Figs. 5-8 showing an alternate apparatus 110 including an alternate T-shaped tank mount 112 and an alternate valve assembly 113. Valve assembly 113 is formed to include an alternate valve housing 114 and valve 21. Tank mount 112 is ring-shaped and configured to form a passageway 130. Tank mount 112 is also formed from a weldable plastics material such as HDPE or any other suitable polymeric plastic.

Alternate tank mount 112, similar to tank mount 12, is molded using an alternate tank mount mold 166, as shown in Fig. 14. Alternate tank mount mold 166 includes upper and lower mold portions 168, 170 forming an alternate annular tank mount mold cavity 172 having a T-shaped cross section. The weldable plastics material is injected into annular tank mount mold cavity 172 by a weldable plastics material injector 74 in order to form alternate tank mount 112 also having a T-shaped cross section.

Valve housing 114 is molded from a non-weldable plastics material such as acetal, for example. Valve housing 114 similarly includes a circular top wall 120, venting outlet 22 coupled to and positioned to lie above top wall 120, and cylindrical sleeve 26 defining interior region 24. Cylindrical sleeve 26 is coupled to and positioned to lie below top wall 120, as shown in Figs. 5 and 6. Valve 21 is positioned to lie within valve chamber 24 of valve assembly in order to open and close aperture 23 of top wall 120 leading to venting outlet 22 for purposes of equalizing the pressure within fuel tank 18 with that of the pressure outside fuel tank 18.

Top wall 120 is formed to include an annular flange 127 having an interior opening forming a T-shaped channel 184, as shown in Figs. 5 and 6. Annular flange 127 includes a top wall 140, opposite side walls 142, 144 coupled to top wall 140, and tab portions 146 coupled to side walls 142, 144 which collectively define channel 128. Channel 128 is formed for receiving tank mount 112 therein. As shown in Figs. 5 and 6, tank mount 112 is also T-shaped and is formed to include a horizontal member 160 having a top surface 162 positioned to engage top wall 140 of annular flange 127 of top wall 120 and a foot or vertical member 164 coupled to horizontal member 160 and formed to include a downwardly facing bottom surface 138 positioned to engage and weldably couple with fuel tank 18, as shown in Fig. 6.

Valve assembly 113 is positioned to lie within aperture 42 of fuel tank 18 in order to provide a mounting arrangement for weldably connecting tank mount 112 of apparatus 110 directly to fuel tank 18 at bottom surface 138 of tank mount 112. As stated above, fuel tank 18 and mount 112 are each made from a weldable plastics material such as HDPE or any other suitable polymeric plastic. Similar to tank mount 12, alternate tank mount 112 includes notch 34, as shown in Fig. 5. Flange 127 includes a locator tab (not shown) formed to be received within notch 34 of tank

mount 112 in order to prevent rotation between tank mount 112 and valve housing 114.

Valve housing 114 is molded using a plastic injection mold 115. Plastic injection mold 115 is similar in structure and function to plastic injection mold 15, described above, and is shown in Figs. 7 and 8. Plastic injection mold 115 includes an upper mold portion 150 and a lower mold portion 152. Lower mold portion 152 is coupled to the plastic material injector 51 and is formed to define a sleeve-forming cavity 158. Upper mold portion 150 is formed to include a top wall-forming cavity 155 and an outlet-forming cavity 157. Tank mount 112 is pre-molded using HDPE or any other suitable weldable plastics material, as described above, and is inserted within plastic injection mold 115, as shown in Fig. 7, when upper and lower mold portions 150, 152 are in the opened position. Tank mount 112 is shown to be inserted within lower mold 152, however, it is within the scope of this disclosure to insert mount 112 within upper mold 150 prior to injecting the non-weldable plastics material onto mold 115.

Once tank mount 112 is inserted into mold 115, upper and lower mold portions 150, 152 are moved to the closed position, as shown in Fig. 8, in order to retain tank mount 112 therein. When in the closed position, mold 115 forms an annular tank mount encapsulation portion 176 which completely surrounds alternate tank mount 112 except for downwardly facing bottom surface 138. Plastics material injector 51 then injects the liquid non-weldable plastics material, such as acetal, through channel 56 in order to fill sleeve-forming cavity 158, top wall-forming cavity 155, and outlet-forming cavity 157. Tank mount 112 is thereby over-molded with the non-weldable plastics material. Once the liquid non-weldable plastics material has cooled to a solid form, a mechanical bond is formed between tank mount 112 and valve housing 114 due to the fact that the non-weldable plastics material has encapsulated alternate tank mount 112 while leaving bottom surface 138 of vertical member 164 exposed so that alternate tank mount 112 is able to be welded to fuel tank 18. Upper and lower mold portions 150, 152 are then moved to the opened position so that alternate T-shaped tank mount 112 and valve housing 114 can be removed from mold 115.

Another embodiment is provided and shown in Figs. 9 and 10.

Alternate apparatus 210 includes alternate valve assembly 113, described above, and alternate tank mount 212. As shown in Figs. 9 and 10, tank mount 212 is also ring-shaped and configured to form a passageway 228. Tank mount 212 has a somewhat J-shaped cross section as shown, for example, in Figs. 9 and 10.

Tank mount 212 includes an annular upper T-shaped portion 230 coupled to a foot portion or an annular lower base portion 232. Similar to tank mount 112, upper T-shaped portion 230 of tank mount 212 includes a first horizontal member 234 having a top surface 236 positioned to engage top wall 140 of annular flange 127 of top wall 120 and a vertical member 238 coupled to horizontal member 234 and lower base portion 232. Upper T-shaped portion 230 is formed to be received within T-shaped channel 184 of top wall 120. Therefore, upper T-shaped portion 230 of tank mount 212 is mechanically coupled to flange 180 of top wall 120. T-shaped portion 230 may also be formed to include one or more notches 34, as described above and shown in Fig. 9. Annular flange 180 may then be formed to include a locator tab (not shown) to be received within notch 34 in order to prevent rotation between tank mount 212 and valve housing 114.

Lower base portion 232 of tank mount 12 is generally shaped in the form of a rectangle having a top surface 242, a downwardly facing bottom surface 244, an interior surface 246, and an exterior surface 248, as shown in Fig. 10. Top surface 242 is positioned to engage one of the tab portions 146 of flange 127 and exterior surface 248 is generally in alignment with side wall 142 of flange 127. Bottom surface 244 of lower base portion 232 is adapted to be weldably coupled to fuel tank 18, as shown in Fig. 10. Valve assembly 113 of apparatus 210 is positioned to lie in aperture 42 of fuel tank 18 in order to provide a mounting arrangement for weldably connecting tank mount 212 directly to fuel tank 18 at bottom surface 244 of tank mount 212. Similar to the previously described embodiments, fuel tank 18 and mount 212 are each made from a weldable plastics material such as HDPE or any other suitable polymeric plastic. Because tank mount 212 includes lower base portion 232, a user will be able to see and confirm the weld connection between bottom surface 244 of lower base portion 232 and fuel tank 18 easily.

Tank mount 212, similar to tank mounts 12 and 112, is molded using an alternate tank mount mold 266, as shown in Fig. 15. Alternate tank mount mold 266 includes upper and lower mold portions 268, 270 and opposite side mold portions 269 forming an alternate annular tank mount mold cavity 272 having a J-shaped cross section. Although mold 266 is shown to include upper, lower, and side mold portions 268, 270, 269, respectively, it is within the scope of this disclosure to provide any mold 266 which forms annular tank mount mold cavity 272. The weldable plastics material is injected into annular tank mount mold cavity 272 by a weldable plastics material injector 74 in order to form alternate tank mount 212 also having a J-shaped cross section.

Vent apparatus 210 is produced using the same injection molding process as described above with reference to vent apparatus 10 and alternate vent apparatus 110. Valve housing 114 of valve assembly 113 is molded using a plastic injection mold 215. Plastic injection mold 215 is similar in structure and function to plastic injection mold 115, described above, and is shown in Figs. 11 and 12. Plastic injection mold 215 includes an upper mold portion 250 and a lower mold portion 252. Lower mold portion 252 is coupled to plastic material injector 51 and is formed to define sleeve-forming cavity 158. Upper mold portion 250 is formed to include top wall-forming cavity 155 and outlet-forming cavity 157. Tank mount 212 is pre-molded using HDPE or any other suitable weldable plastics material, as described above, and is inserted within plastic injection mold 215, as shown in Fig. 11, when upper and lower mold portions 250, 252 are in the opened position. Tank mount 212 is shown to be inserted within lower mold 252, however, it is within the scope of this disclosure to insert mount 212 within upper mold 250 prior to injecting the non-weldable plastics material onto mold 215.

Once tank mount 212 is inserted into mold 215, upper and lower mold portions 250, 252 are moved to the closed position, as shown in Fig. 8, in order to retain tank mount 212 therein. When in the closed position, mold 215 forms an annular tank mount encapsulation portion 276 which is formed to entirely surround upper portion 230 of tank mount 212. Plastics material injector 51 then injects the liquid non-weldable plastics material, such as acetal, through channel 56 in order to fill sleeve-forming cavity 158, top wall-forming cavity 155, and outlet-forming cavity 157.

Tank mount 212 is thereby over-molded with the non-weldable plastics material in order to mechanically couple valve housing 114 to tank mount 212.

Once the liquid non-weldable plastics material has cooled to a solid form, a mechanical bond is formed between tank mount 212 and valve assembly 113 due to the fact that the non-weldable plastics material has encapsulated upper portion 230 of tank mount 212. Lower base portion 232 of tank mount 212 is thereby provided to be welded to fuel tank 18. Upper and lower mold portions 250, 252 are then moved to the opened position so that J-shaped tank mount 212 and valve housing 114 can be removed from mold 215.

The present invention allows for the attachment of a non-weldable plastics material, such as acetal, to a weldable plastics material, such as HDPE in order for the finished product to be functional for hot plate welding. Each tank mount 12, 112, and 212, for example, is provided for hot plate welding to fuel tank 18 in order to couple apparatus 10, 110, 210 to fuel tank 18.

The over-molding process disclosed herein reduces the amount of weldable plastics material required and thereby reduces the molding difficulties which may arise with the use of weldable plastics material. A reduction in the amount of weldable plastics material required would also result in a cost reduction of that material used. Further, the reduction in weldable plastics material used would facilitate the molding process by dimensionally controlling the non-weldable plastics material portions such as valve housings 14, 114. The use of the over-molding process allows a larger percentage of vent apparatus 10, 110, 210 to be able to be made of the non-permeable weldable material which forms tank mount 12, 112, 212, respectively. Further, the non-weldable plastics material used to form valve housing 14 may have a tendency to shrink during the cooling process after having been injected into the mold. Therefore, the non-weldable material of valve housing 14 will shrink around tank mount 12 in order to form a tight mechanical bond between tank mount 12 and valve housing 14 once valve housing 14 is injection-molded over tank mount 12.

Although the invention has been described in detail with reference to preferred embodiments, variations and modifications exist within the scope and spirit of the invention as described and defined in the following claims.

## CLAIMS

## ART 34 AMDT

1. A method of forming a vent apparatus adapted to be coupled to a fuel tank, the method comprising the steps of
  - 5 providing a tank mount made of a weldable plastics material and adapted to be welded to an exterior surface of a fuel tank and
  - injecting a non-weldable plastics material into a valve housing mold cavity containing the tank mount to overmold the tank mount with the non-weldable plastics material to produce a valve housing having a venting outlet arranged to
  - 10 communicate with a valve chamber formed in the valve housing and arranged to extend above the tank mount.
2. The method of claim 1, wherein the providing step includes the steps of forming a tank mount mold to include an annular tank mount mold cavity having an L-shaped cross section and injecting a weldable plastics material into the
- 15 annular tank mount mold cavity to produce a ring-shaped tank mount having an L-shaped cross section.
3. The method of claim 2, wherein the ring-shaped tank mount includes an annular foot including a downwardly facing bottom surface adapted to be welded to an exterior surface of a fuel tank to support the valve housing in an aperture
- 20 formed in the fuel tank and an annular arm coupled to the annular foot and arranged to extend radially inwardly and include an inner rib and the step of injecting a non-weldable plastics material into a valve housing mold cavity includes the steps of forming a valve housing mold to include an inner rib encapsulation portion surrounding the inner rib and filling the inner rib encapsulation portion with non-weldable plastics
- 25 material to encapsulate the inner rib to mechanically couple the valve housing to the ring-shaped tank mount.
4. The method of claim 1, wherein the providing step includes the steps of forming a tank mount mold to include an annular tank mount mold cavity having a T-shaped cross section and injecting a weldable plastics material into the
- 30 annular tank mount mold cavity to produce a ring-shaped tank mount having a T-shaped cross section.



5. The method of claim 4, wherein the step of injecting a non-weldable plastics material into a valve housing mold cavity includes the steps of forming a valve housing mold to include an annular tank mount encapsulation portion surrounding all but a downwardly facing bottom surface of a foot of the ring-shaped tank mount having a T-shaped cross section contained in the valve housing mold and filling the annular tank mount encapsulation portion with the non-weldable plastics material to encapsulate the ring-shaped tank mount to mechanically couple the valve housing to the ring-shaped tank mount yet expose the downwardly facing bottom surface of the foot of the ring-shaped tank mount to adapt the tank mount to be welded to an exterior surface of a fuel tank to support the valve housing in an aperture formed in the fuel tank.

6. The method of claim 1, wherein the providing step includes the steps of forming a tank mount mold to include an annular tank mount mold cavity having a J-shaped cross section and injecting a weldable plastics material into the annular tank mount mold cavity to produce a ring-shaped tank mount having a J-shaped cross section.

7. The method of claim 6, wherein the step of injecting a non-weldable plastics material into a valve housing mold cavity includes the steps of forming a valve housing mold to include an encapsulation portion surrounding an annular upper portion of the ring-shaped tank mount, the annular upper portion having a T-shaped cross section, and a foot portion defining an annular lower portion of the ring-shaped tank mount coupled to the annular upper portion and positioned to lie below the encapsulation portion, filling the encapsulation portion with non-weldable plastics material to mechanically couple the valve housing to the ring-shaped tank mount, and filling the foot portion with non-weldable plastics material to produce the ring-shaped tank mount having a J-shaped cross section and to provide a downwardly facing bottom surface on the annular lower portion of the ring-shaped tank mount that is adapted to be welded to an exterior surface of a fuel tank to support the valve housing in an aperture formed in the fuel tank.

8. A method of forming a vent apparatus adapted to be coupled to a vehicle fuel tank, the method comprising the steps of

- providing a weldable tank mount formed to include an inner rim and to define a passageway and a plastic injection mold including an upper mold portion and a lower mold portion such that the upper and lower mold portions are movable between an open position adapted to receive the weldable tank mount and a closed position
- 5 adapted to retain the weldable tank mount therein,
- moving the upper and lower mold portions to the opened position,
- placing the weldable tank mount within one of the upper and lower mold portions of the mold cavity,
- moving the upper and lower mold portions to the closed position to
- 10 retain the weldable tank mount within the mold cavity,
- filling the upper and lower mold portions with a non-weldable liquid plastics material to form a fuel systems valve component around the weldable tank mount such that the fuel systems valve component is formed to include a channel and the inner rim of the weldable tank mount is received within the channel so that the
- 15 weldable tank mount is mechanically coupled to the fuel systems valve component to produce an apparatus adapted to be coupled to a fuel tank,
- cooling the liquid plastics material to establish a mechanical bond between the weldable tank mount and the fuel systems valve component,
- moving the upper and lower mold portions to the opened position, and
- 20 removing the apparatus from the cavity.
9. The method of claim 8, wherein the lower mold portion is formed to define a sleeve-forming cavity and the upper mold portion is formed to define a top wall-forming cavity and an outlet-forming cavity.
10. The method of claim 9, wherein providing the plastic injection
- 25 mold further includes the step of providing a passageway defined by the lower mold portion and formed to receive liquid plastics material so that the liquid plastics material is injected into the sleeve-forming cavity first, the top wall-forming cavity second, and the outlet-forming cavity third.
11. A method of forming vent apparatus adapted to be coupled to a
- 30 fuel tank, the method comprising the steps of
- providing a tank mount formed from a weldable plastics material and formed to include a body having a T-shaped cross-section and also providing a plastic

- injection mold formed to include an upper mold portion and a lower mold portion, the upper and lower mold portions being movable between an opened position adapted to receive the tank mount and a closed position adapted to retain the tank mount therein,
- moving the upper and lower mold portions to the opened position,
- 5 placing the tank mount within one of the upper mold portion and the lower mold portion of the plastic injection mold,
- moving the upper and lower mold portions to the closed position to retain the tank mount within the plastic injection mold,
- filling the upper and lower mold portions with a non-weldable liquid
- 10 plastics material to form a valve housing around the tank mount formed to define a top wall having an annular flange defining a T-shaped channel formed to receive the tank mount therein to cause the tank mount to be mechanically coupled to the valve housing,
- cooling the liquid plastics material to establish a mechanical bond between the tank mount and the fuel systems valve component,
- 15 moving the upper and lower mold portions to the opened position, and removing a unit including the valve housing and tank mount from the plastic injection mold.
12. A method of forming a vent apparatus adapted to be coupled to a fuel tank, the method comprising the steps of
- 20 providing a tank mount having a J-shaped cross-section and formed from a weldable plastics material and formed to include a body having a T-shaped upper portion and a base portion coupled to the T-shaped upper portion and also providing a plastic injection mold formed to include an upper mold portion and a lower mold portion wherein the upper and lower mold portions are movable between an opened
- 25 position adapted to receive the tank mount and a closed position adapted to retain the tank mount therein,
- moving the upper and lower mold portions to the opened position,
- placing the tank mount within one of the upper mold portion and the lower mold portion of the plastic injection mold,
- 30 moving the upper and lower mold portions to the closed position to retain the tank mount within the plastic injection mold,

filling the upper and lower mold portions with a non-weldable liquid plastics material to form a valve housing around the tank mount formed to define a top wall having an annular flange defining a T-shaped channel formed to receive the T-shaped portion of the tank mount therein to cause the tank mount to be mechanically  
5 coupled to the valve housing,

cooling the liquid plastics material to establish a mechanical bond between the tank mount and the fuel systems valve component,  
moving the upper and lower mold portions to the opened position, and  
removing the valve housing and tank mount combination from the  
10 plastic injection mold.

13. A vent apparatus adapted to be coupled to a vehicle fuel tank, the apparatus comprising

a valve housing made from a non-weldable plastics material and formed to include a cylindrical sleeve defining an interior region, a top wall coupled to the  
15 cylindrical sleeve and formed to include an aperture and an annular flange defining an annular channel, and a venting outlet coupled to the top wall at the aperture and provided to conduct fuel and fuel vapor from the interior region of the cylindrical sleeve to another destination outside the valve housing,

a valve positioned to lie within the interior region of the cylindrical  
20 sleeve and formed to move within the interior region of the cylindrical sleeve to open and close the aperture defined by the top wall of the valve housing which leads to the venting outlet, and

a tank mount made from a weldable plastics material, coupled to the top wall of the valve housing, and formed to include an outer rim adapted to be coupled to  
25 the fuel tank to support the cylindrical sleeve within the tank, an annular rib formed to be received within the annular channel of the flange of the top wall, and a top wall coupled to and positioned to lie between the outer rim and the annular rib, the tank mount being positioned to cause the top wall of the tank mount and the top wall of the valve housing to lie in coplanar relation with one another.

30 14. The apparatus of claim 13, wherein the tank mount is ring-shaped and is further formed to include an annular interior wall defining an opening formed to

PCT/US 00/15178

IPEA/US 29 DEC 2000

200 34251

IPEA/US 29 DEC 2001

a tank mount coupled to the top wall of the valve housing and formed to include an outer rim adapted to be coupled to the fuel tank to support the cylindrical sleeve within a mounting aperture of the tank and an annular rib formed to be received within the annular channel of the flange, and wherein the valve housing includes a  
5 locator tab coupled to the annular flange and the annular rib includes a notch formed to receive the locator tab of the valve housing in order to prevent rotation between the valve housing and the tank mount.

21. The apparatus of claim 20, wherein the tank mount includes a top wall and the venting outlet of the valve housing is positioned to lie above the top wall  
10 of the tank mount and the cylindrical sleeve of the valve housing is positioned to lie below the top wall of the tank mount.

22. The apparatus of claim 21, wherein the tank mount further includes an interior wall defining an opening for receiving the top wall of the valve housing therein and the inner rib of the tank mount is coupled to the interior wall and  
15 positioned to extend into the opening of the tank mount, and wherein the tank mount further includes a top wall positioned to extend radially outwardly from the interior wall, and the outer rim is coupled to the top wall and is positioned to extend radially downwardly from the top wall.

23. The apparatus of claim 21, wherein the valve housing is made  
20 from a non-weldable plastics material and the tank mount is made from a weldable plastics material and the inner rib of the tank mount is received within the channel of the flange of the top wall of the valve housing to cause the tank mount to be mechanically coupled to the valve housing.

24. A vent apparatus adapted to be coupled to a fuel tank, the  
25 apparatus comprising

a valve housing made from a non-weldable plastics material and formed to include a cylindrical sleeve defining an interior region, a top wall coupled to the cylindrical sleeve and formed to include an aperture and an annular flange having an interior opening forming a channel adapted to face the fuel tank, and a venting outlet  
30 coupled to the top wall at the aperture and provided to conduct fuel and fuel vapor from the interior region of the cylindrical sleeve to another destination outside the valve housing,

a valve positioned to lie within the interior region of the cylindrical sleeve and formed to move within the interior region of the cylindrical sleeve to open and close the aperture defined by the top wall of the valve housing which leads to the venting outlet, and

a tank mount made from a weldable plastics material and formed to be received within the channel of the flange of the top wall of the valve housing to cause the flange to completely surround the tank mount, the tank mount having a bottom surface adapted to be weldably coupled to the fuel tank in order to support the valve housing within a mounting aperture formed in the fuel tank.

25. The apparatus of claim 24, wherein the tank mount forms a T-shaped cross section and the channel of the flange of the valve housing is similarly formed to define a T-shaped cross-section.

26. The apparatus of claim 25, wherein the tank mount includes a horizontal portion and a vertical portion coupled to the horizontal portion at a first end and adapted to be weldably coupled to the fuel tank at a second end defining the bottom surface.

27. The apparatus of claim 25, wherein the tank mount is further formed to define a notch and the flange of the valve housing includes a locator tab formed to be received within the notch of the tank mount in order to prevent rotation between the tank mount and the valve housing.

28. The apparatus of claim 24, wherein the annular flange of the valve housing is formed to include a top wall coupled to the top wall of the valve housing, opposite side walls positioned to lie in spaced-apart relation to each other, and a tab portion coupled to each side wall in order to define the T-shaped channel.

29. A vent apparatus adapted to be coupled to a fuel tank, the apparatus comprising

a valve housing made from a non-weldable plastics material and formed to include a cylindrical sleeve defining an interior region, a top wall coupled to the cylindrical sleeve and formed to include an aperture and an annular flange having an interior opening forming a channel adapted to face the fuel tank, and a venting outlet coupled to the top wall at the aperture and provided to conduct fuel and fuel vapor from

the interior region of the cylindrical sleeve to another destination outside the valve housing,

a valve positioned to lie within the interior region of the cylindrical sleeve and formed to move within the interior region of the cylindrical sleeve to open  
5 and close the aperture defined by the top wall of the valve housing which leads to the venting outlet, and

a tank mount made from a weldable plastics material, formed to include a T-shaped portion formed to be received within the channel of the flange of the top wall of the valve housing to cause the flange to completely surround the T-shaped  
10 portion and a base portion coupled to the T-shaped portion and adapted to be weldably coupled to the fuel tank in order to support the valve housing within a mounting aperture of the fuel tank.

30. The apparatus of claim 29, wherein the flange of the valve housing is formed to include a locator tab and the T-shaped portion of the tank mount is  
15 formed to define a notch formed to receive the locator tab therein to prevent rotation of the tank mount relative to the valve housing.

31. The apparatus of claim 29, wherein the T-shaped portion is formed to include a horizontal portion and a vertical portion coupled to the horizontal portion at a first end and coupled to the base portion at a second end, and the base  
20 portion is formed to include a top surface coupled to the vertical portion, an interior surface, and exterior surface, and a bottom surface adapted to be coupled to the fuel tank.

32. The apparatus of claim 31, wherein the flange is formed to include an outer side wall and the outer side wall is positioned to lie in coplanar relation  
25 with the exterior surface of the base portion of the tank mount.

33. The apparatus of claim 31, wherein the annular flange of the valve housing is formed to include a top wall coupled to the top wall of the valve housing, opposite side walls positioned to lie in spaced-apart relation to each other, and a tab portion coupled to each side wall in order to define the T-shaped channel.

30 34. A method of forming a vent apparatus adapted to be coupled to a fuel tank, the method comprising the steps of



providing a tank mount formed from a weldable plastics material and  
formed to include a body having an L-shaped cross-section and also providing a plastic  
injection mold formed to include an upper mold portion and a lower mold portion, the  
upper and lower mold portions being movable between an opened position adapted to  
5 receive the tank mount and a closed position adapted to retain the tank mount therein,  
moving the upper and lower mold portions to the opened position,  
placing the tank mount within one of the upper mold portion and the  
lower mold portion of the plastic injection mold,  
moving the upper and lower mold portions to the closed position to  
10 retain the tank mount within the plastic injection mold,  
filling the upper and lower mold portions with a non-weldable liquid  
plastics material to form a valve housing around the tank mount formed to define a top  
wall having an annular flange defining an L-shaped channel formed to receive the tank  
mount therein to cause the tank mount to be mechanically coupled to the valve housing,  
15 cooling the liquid plastics material to establish a mechanical bond  
between the tank mount and the fuel systems valve component,  
moving the upper and lower mold portions to the opened position, and  
removing a unit including the valve housing and tank mount from the  
plastic injection mold.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
7 December 2000 (07.12.2000)

PCT

(10) International Publication Number  
**WO 00/73039 A1**

(51) International Patent Classification<sup>7</sup>: **B29C 45/14,**  
45/16, F16K 24/04

(21) International Application Number: **PCT/US00/15178**

(22) International Filing Date: **1 June 2000 (01.06.2000)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:  
60/136,990 **1 June 1999 (01.06.1999) . US**

(71) Applicant (for all designated States except US): **STANT  
MANUFACTURING INC. [US/US]; 1620 Columbia Av-  
enue, Connerville, IN 47331 (US).**

IN 47331 (US). **BLEASE, Thomas [US/US]; 1176 Alisa  
Drive, Connerville, IN 47331 (US). DEVAL, Jeffrey  
[US/US]; 232 West County Road 200 North, Liberty, IN  
47353 (US). SMITH, Dwight [US/US]; P.O. Box 485,  
Milton, IN 47357 (US).**

(74) Agents: **REZEK, Richard, A. et al.; Barnes & Thornburg,  
11 South Meridian Street, Indianapolis, IN 46204 (US).**

(81) Designated States (national): **CA, US.**

(84) Designated States (regional): **European patent (AT, BE,  
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,  
NL, PT, SE).**

**Published:**


— *With international search report.*

(72) Inventors; and

(75) Inventors/Applicants (for US only): **AMBURGEY,  
Nancy [US/US]; 2825 Vermont Avenue, Connerville,**


*For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.*


(54) Title: **WELDABLE MOUNT FOR FUEL SYSTEMS COMPONENT**

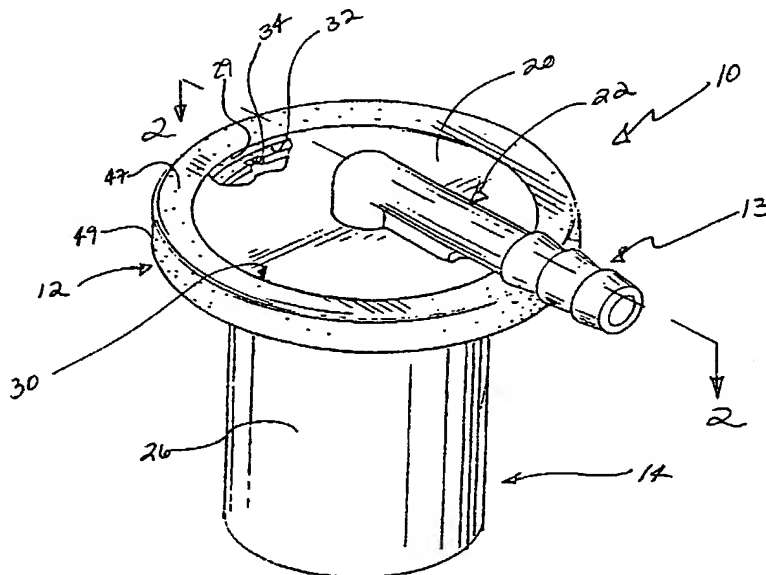

(57) Abstract: A vent apparatus (10) includes a tank mount (12) made of a weldable plastics material and a fuel systems component such as a valve assembly (13). Valve assembly (13) includes a valve housing (14) made of a non-weldable plastics material and a valve (21) movable in a valve chamber (24) formed in valve housing (14) to open and close an aperture (23) leading to a venting outlet (22). Tank mount (12) supports valve housing (14) in a position in a mounting aperture (16) formed in a fuel tank (18). Valve housing (14) is made by injecting non-weldable plastics material into a mold containing the pre-molded tank mount (12).

**WO 00/73039 A1**

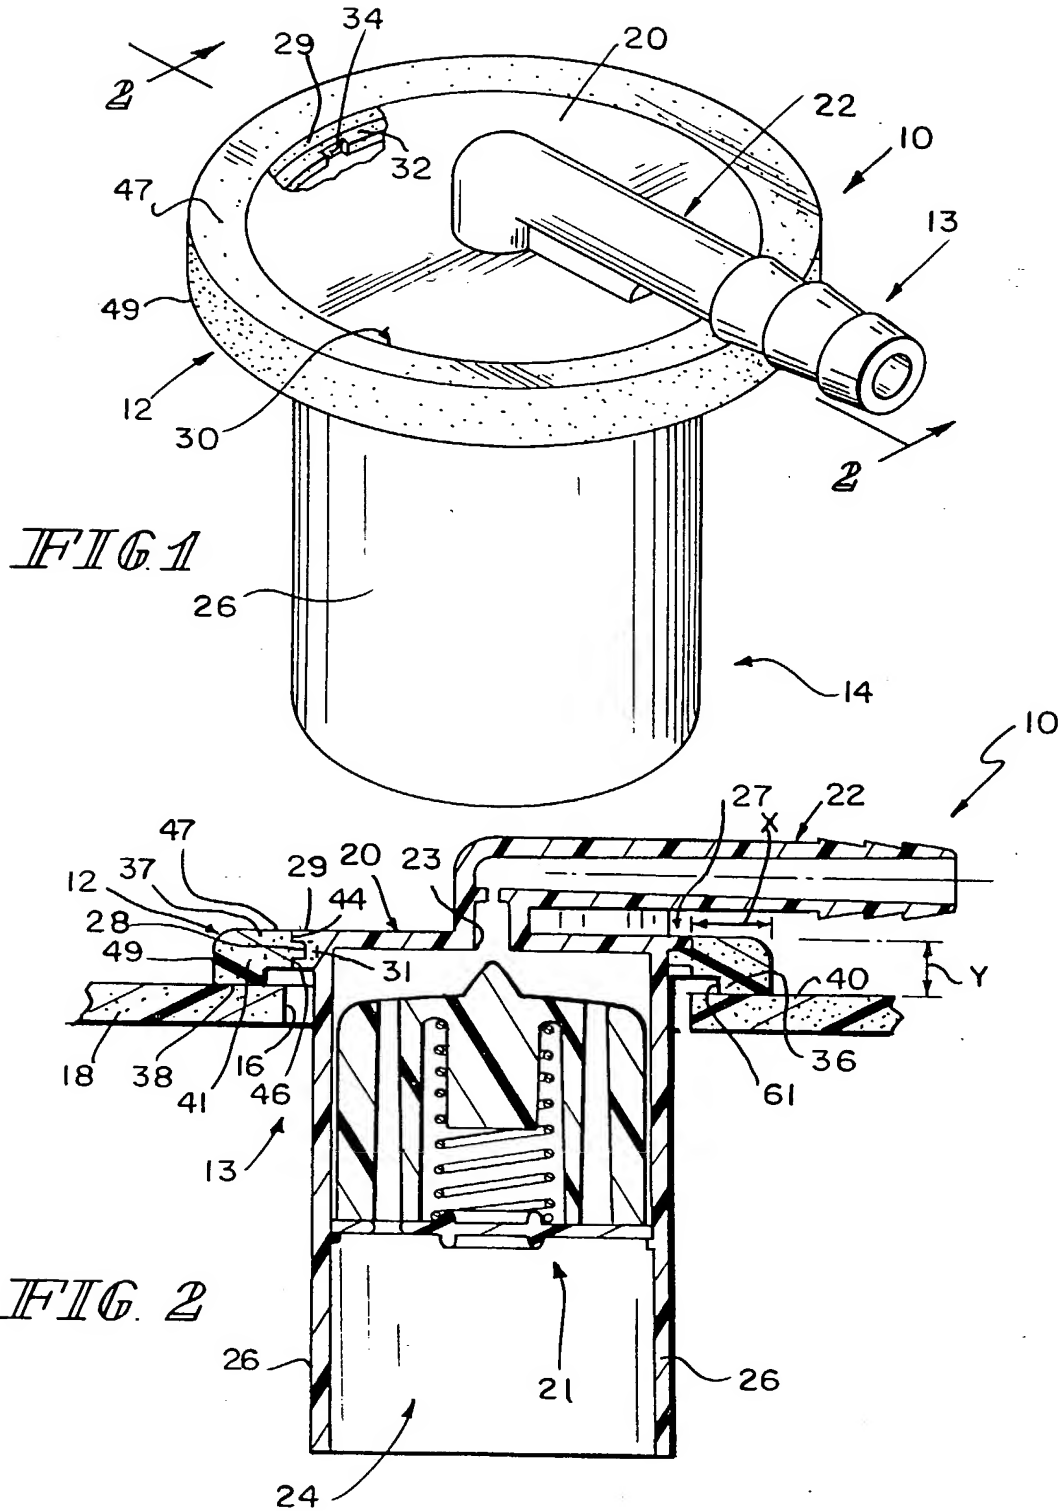

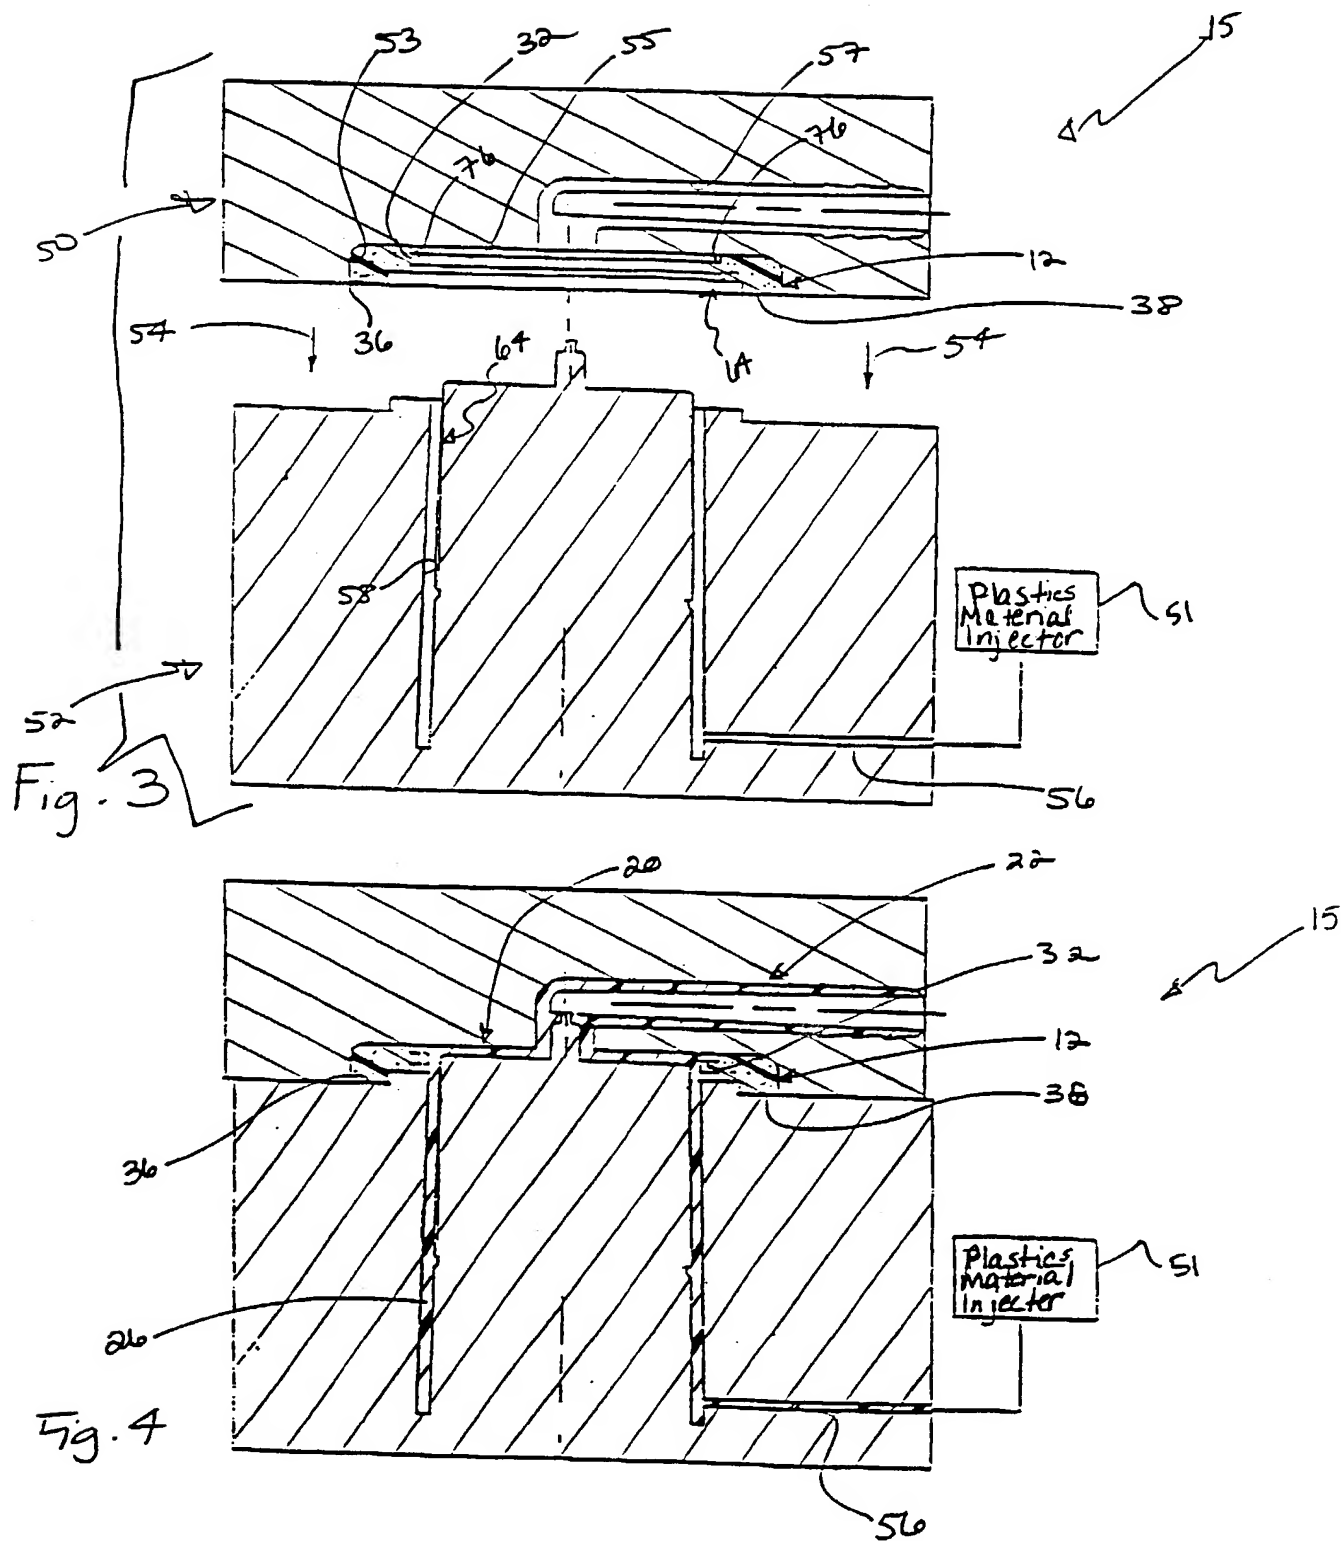

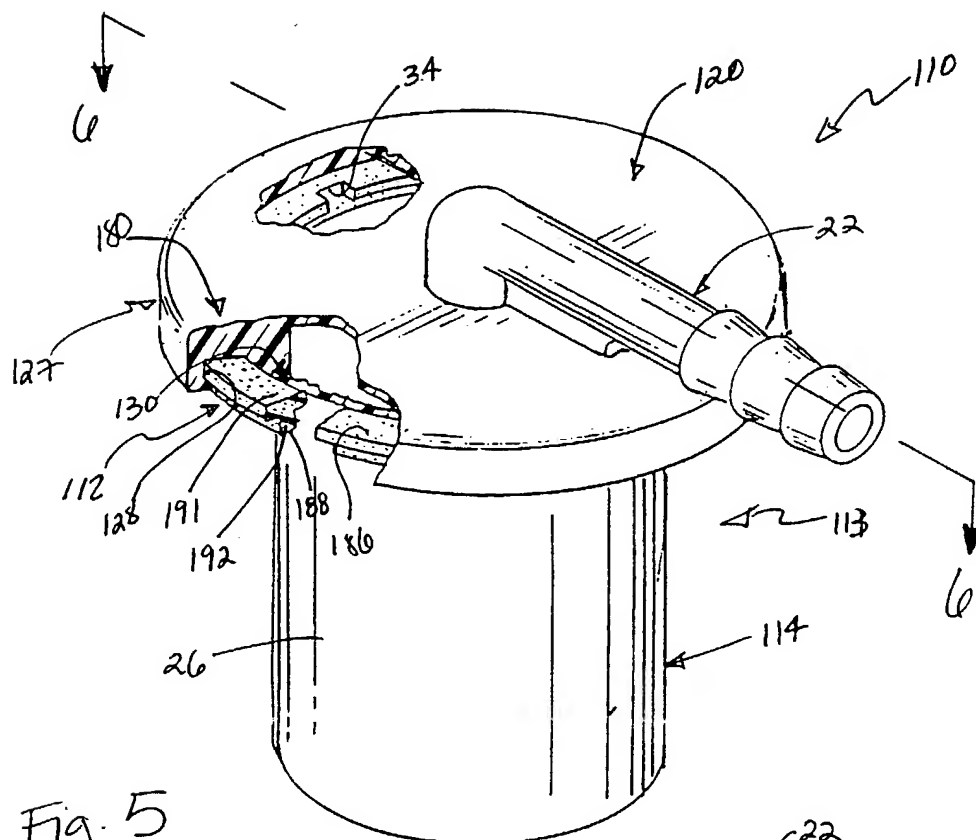


Fig. 5

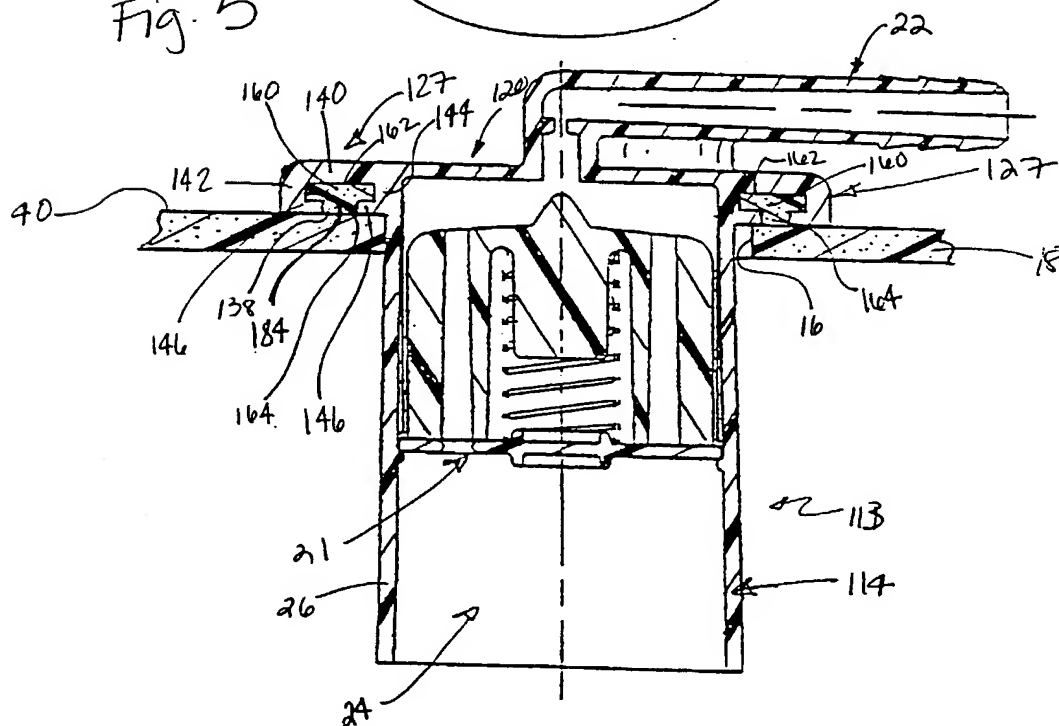
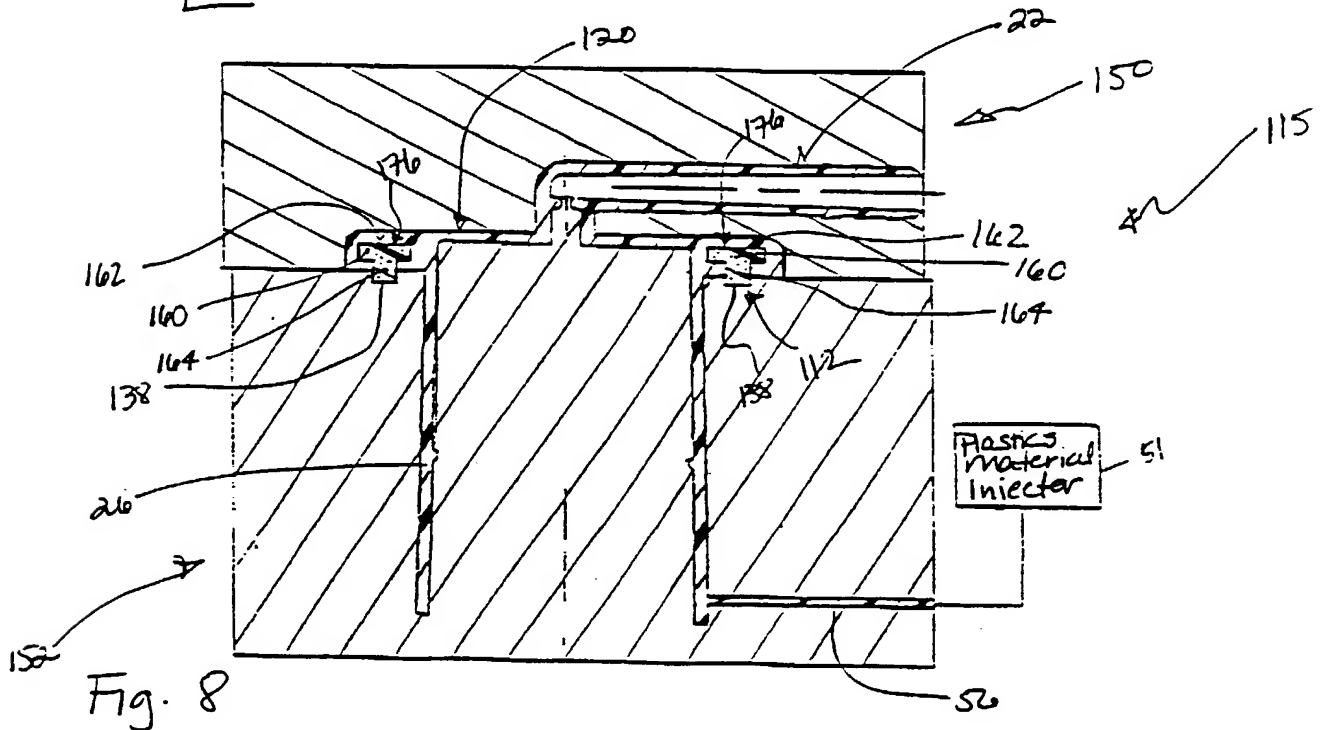
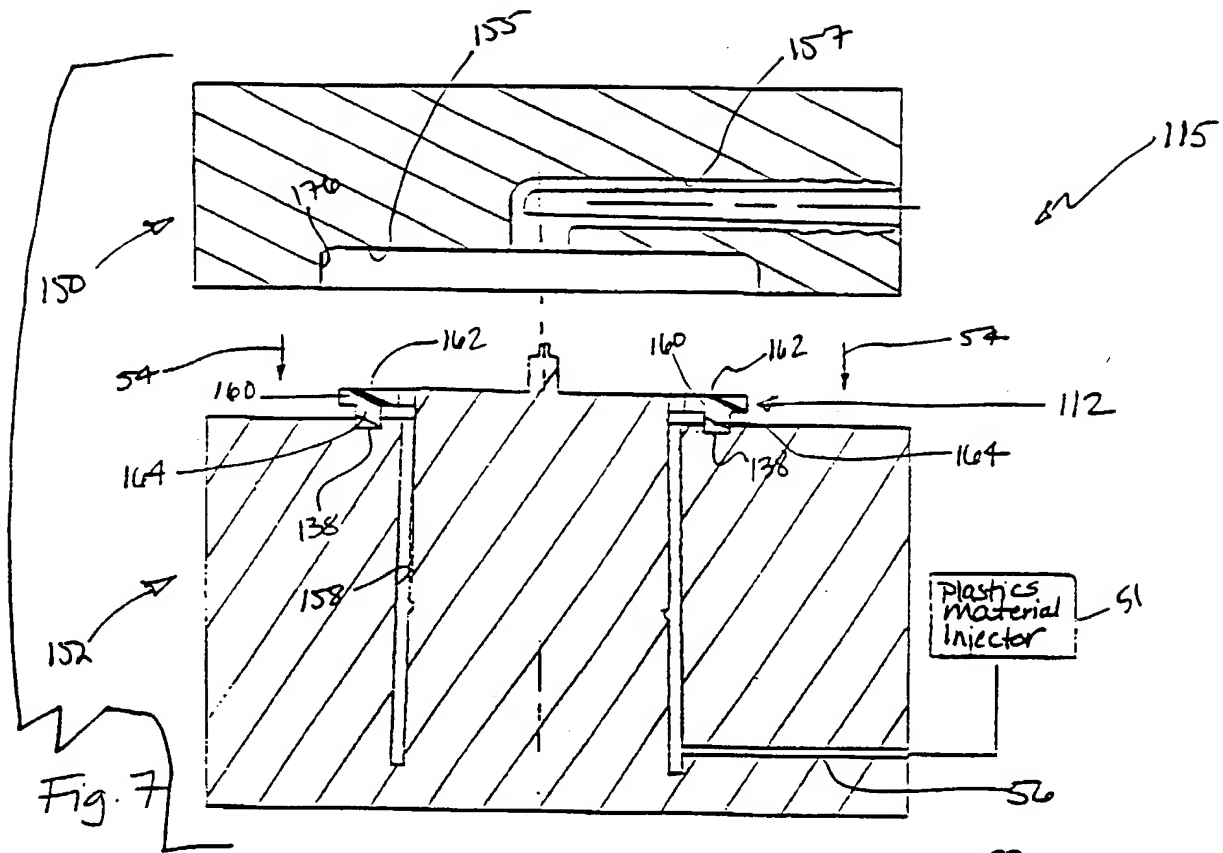




Fig. 6





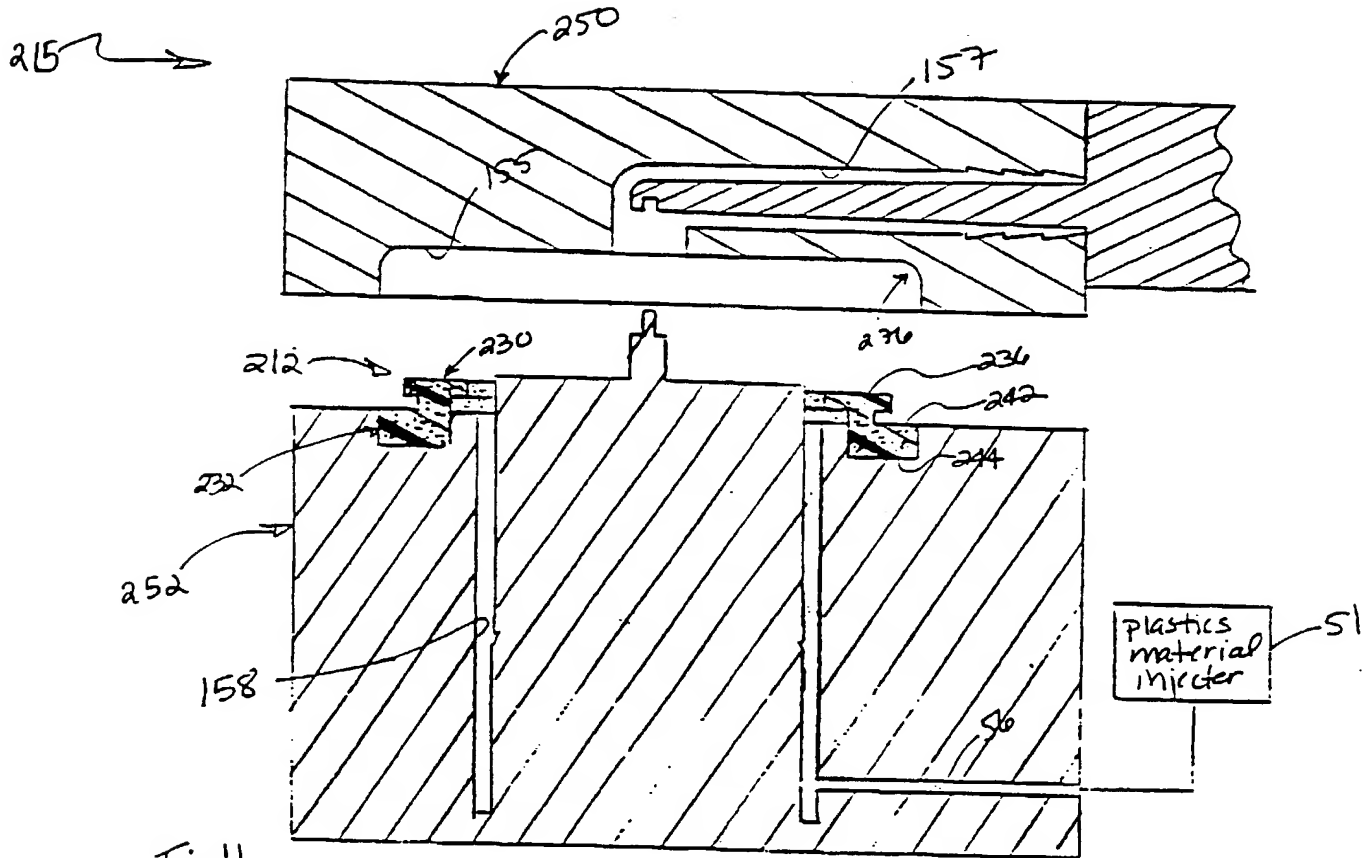


Fig. 11




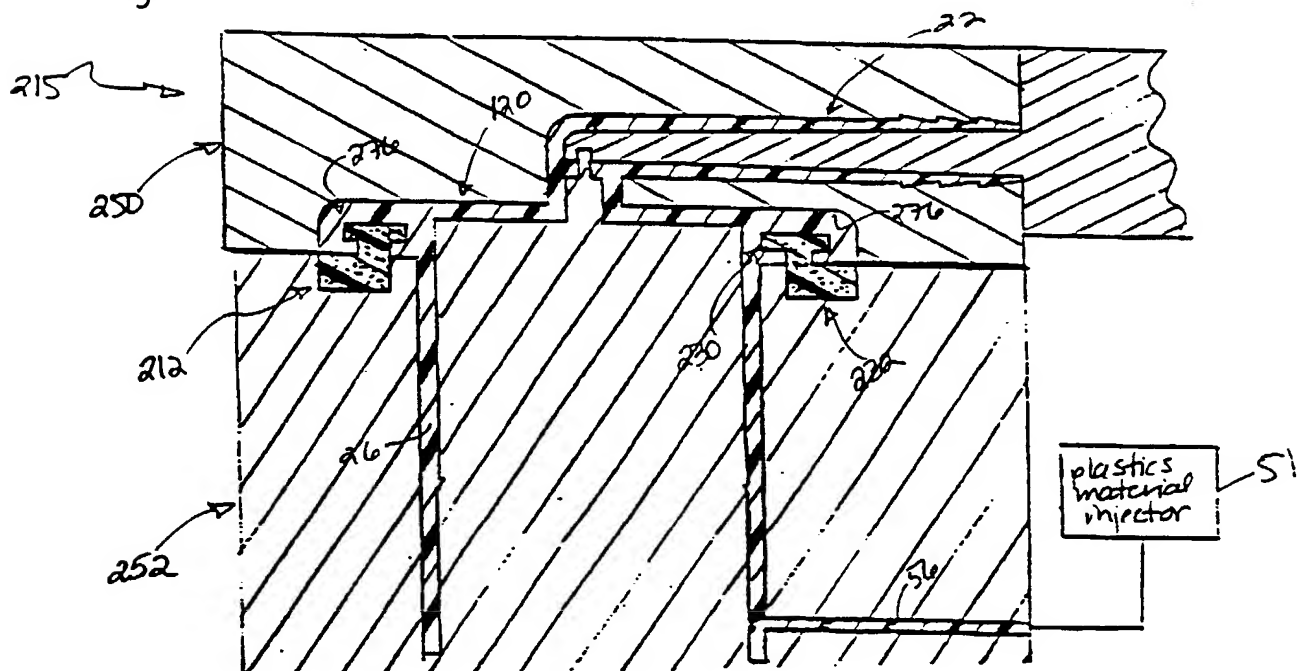


Fig. 12

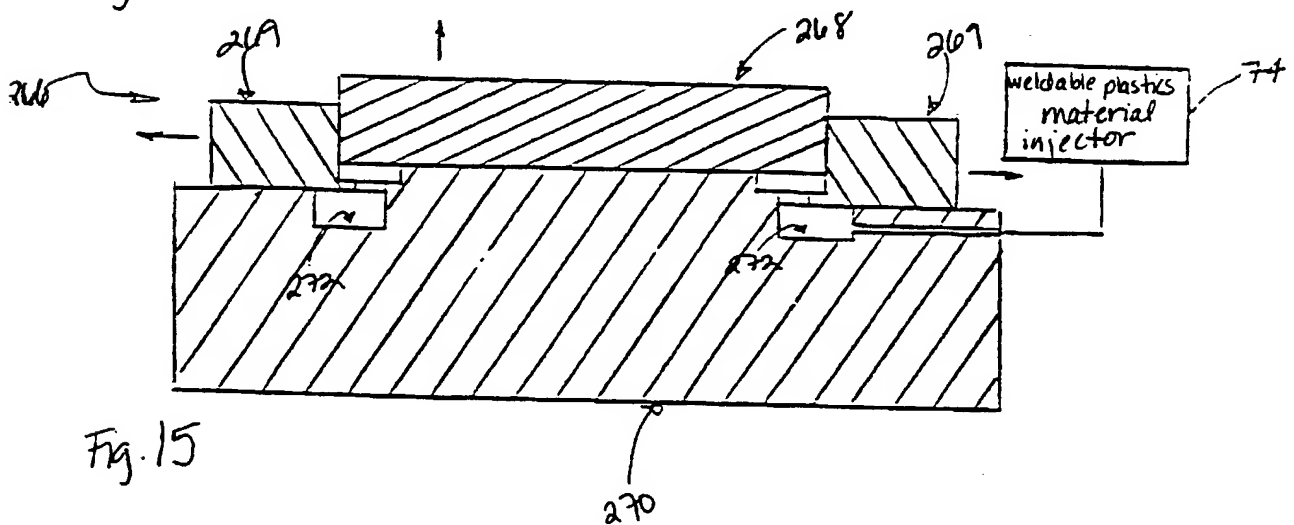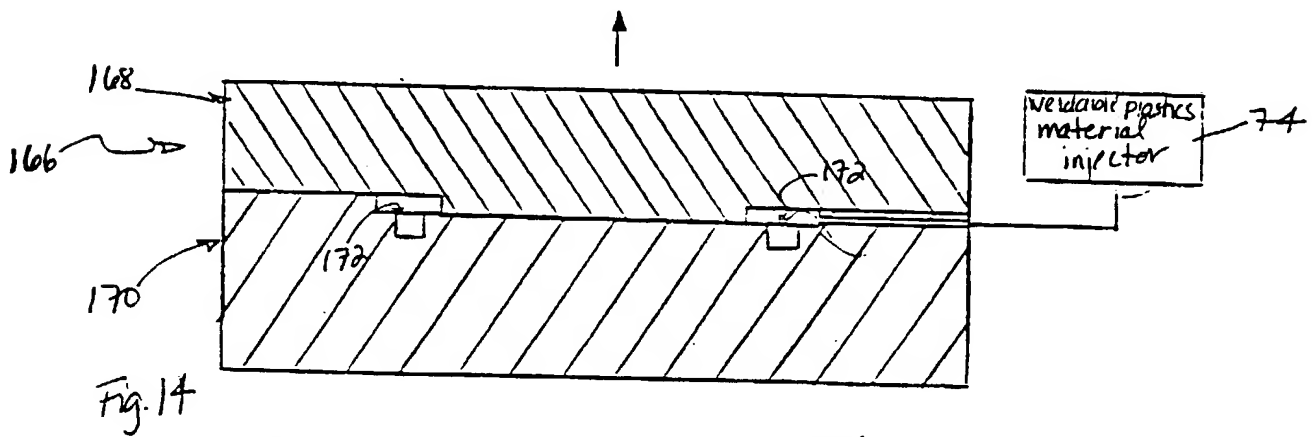

7 / 7

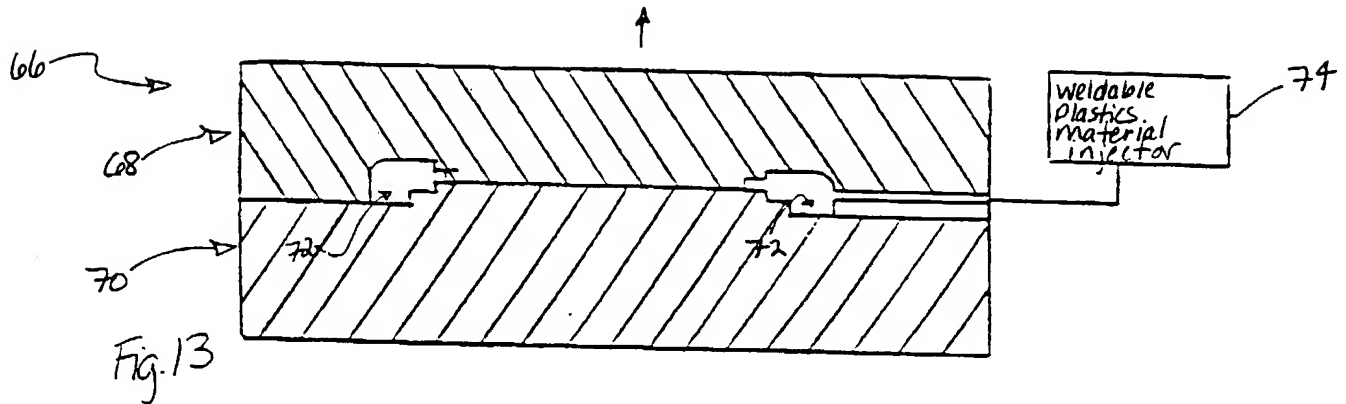

As a below named inventor, I hereby declare that I believe I am the original, first and sole inventor (*if only one name is listed below*) or an original, first and joint inventor (*if plural names are listed below*) of the subject matter which is claimed and for which a patent is sought in the application entitled:

WELDABLE MOUNT FOR FUEL SYSTEMS COMPONENT, the specification of which  
(check one) \_\_\_\_\_ is attached hereto \_\_\_\_\_ as  
XX was filed on 01 June 2000 (01.06.00) \_\_\_\_\_ or  
United States Application Serial No. \_\_\_\_\_  
PCT International Application No. PCT/US00/15178 \_\_\_\_\_  
and was amended on 29 December 2000 (29.12.00) and 22 June 2001 (22.06.01) \_\_\_\_\_

I hereby declare that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to herein.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) of any foreign application(s) for patent or inventor's certificate on which priority is claimed (as listed below) and I have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s) Priority Claimed

(Number)	(Country)	(Day/Month/Year Filed)	Yes	No
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No

I hereby claim benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

<u>60/136,990</u>	<u>01 June 1999 (01.06.99)</u>
Application Number	Filing Date

Application Number	Filing Date
--------------------	-------------

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(b) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

<u>Application Serial No.</u>	<u>Filing Date</u>	<u>Status-patented, pending, abandoned</u>
-------------------------------	--------------------	--------------------------------------------

Application Serial No.	Filing Date	Status-patented, pending, abandoned
------------------------	-------------	-------------------------------------

I hereby appoint William R. Coffey, Reg. No. 24023; Arland T. Stein, Reg. No. 25062; Nancy J. Harrison, Reg. No. 27083; Richard D. Conard, Reg. No. 27321; Dilip A. Kulkarni, Reg. No. 27510; Steven R. Lammert, Reg. No. 27653; Richard A. Rezek, Reg. No. 30796; David B. Quick, Reg. No. 31993; Paul B. Hunt, Reg. No. 37154; Jeffrey A. Michael, Reg. No. 37394; Shawn D. Bauer, Reg. No. 41603; Jill T. Powlick, Reg. No. 42088; Ronald S. Henderson, Reg. No. 43669; James R. Sweeney II, Reg. No. 45670; Dustin S. DuBois, Reg. No. 46233; Christopher E. Haigh, Reg. No. 46377; Kevin D. Bailey, Reg. No. 46531; Rebecca Ball, Reg. No. 46535; Dewayne A. Hughes, Reg. No. 46783; Perry Palan, Reg. No. 26213; Mark M. Newman, Reg. No. 31472; Richard P. Krinsky, Reg. No. 47720; Bobby B. Gillenwater, Reg. No. 31105; Gregory S. Cooper, Reg. No. 40965; Scott M. Lohnes, Reg. No. 45451; Thomas J. Donovan, Reg. No. 33231; Alice O. Martin, Reg. No. 35601; Grant H. Peters, Reg. No.

Attorney Docket No.: 3177-69131  
Client Reference No.: ST-304A

**DECLARATION AND POWER OF ATTORNEY -- PATENT APPLICATION**

As a below named inventor, I hereby declare that I believe I am the original, first and sole inventor (*if only one name is listed below*) or an original, first and joint inventor (*if plural names are listed below*) of the subject matter which is claimed and for which a patent is sought in the application entitled:

WELDABLE MOUNT FOR FUEL SYSTEMS COMPONENT, the specification of which  
*(check one)* \_\_\_\_\_ is attached hereto  
XX was filed on 01 June 2000 (01.06.00) as  
United States Application Serial No. \_\_\_\_\_ or  
PCT International Application No. PCT/US00/15178  
and was amended on 29 December 2000 (29.12.00) and 22 June 2001 (22.06.01)

I hereby declare that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to herein.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) of any foreign application(s) for patent or inventor's certificate on which priority is claimed (as listed below) and I have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)	Priority Claimed

[illegible]

I hereby claim benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

<u>60/136,990</u>	<u>01 June 1999 (01.06.99)</u>
Application Number	Filing Date

Application Number	Filing Date
--------------------	-------------

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(b) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application Serial No.	Filing Date	Status-patented, pending, abandoned
------------------------	-------------	-------------------------------------

Application Serial No.	Filing Date	Status-patented, pending, abandoned
------------------------	-------------	-------------------------------------

I hereby appoint William R. Coffey, Reg. No. 24023; Arland T. Stein, Reg. No. 25062; Nancy J. Harrison, Reg. No. 27083; Richard D. Conard, Reg. No. 27321; Dilip A. Kulkarni, Reg. No. 27510; Steven R. Lammert, Reg. No. 27653; Richard A. Rezek, Reg. No. 30796; David B. Quick, Reg. No. 31993; Paul B. Hunt, Reg. No. 37154; Jeffrey A. Michael, Reg. No. 37394; Shawn D. Bauer, Reg. No. 41603; Jill T. Powlick, Reg. No. 42088; Ronald S. Henderson, Reg. No. 43669; James R. Sweeney II, Reg. No. 45670; Dustin S. DuBois, Reg. No. 46233; Christopher E. Haigh, Reg. No. 46377; Kevin D. Bailey, Reg. No. 46531; Rebecca Ball, Reg. No. 46535; Dewayne A. Hughes, Reg. No. 46783; Perry Palan, Reg. No. 26213; Mark M. Newman, Reg. No. 31472; Richard P. Krinsky, Reg. No. 47720; Bobby B. Gillenwater, Reg. No. 31105; Gregory S. Cooper, Reg. No. 40965; Scott M. Lohnes, Reg. No. 45451; Thomas J. Donovan, Reg. No. 33231; Alice O. Martin, Reg. No. 35601; Grant H. Peters, Reg. No.

From: STANT TECH CENTER

765 825 3154

10/19/2001 15:00 #087 P.003/003

35977; Mark A. Hamill, Reg. No. 37145; Michael B. Allen, Reg. No. 37582; and Daniel P. Albers, Reg. No. 44008, as attorneys of record with full power of substitution and revocation, to prosecute this application, and to transact all business in the Patent and Trademark Office connected therewith, and I specify that communications regarding the application be directed to:

BARNES & THORNBURG  
11 South Meridian Street  
Indianapolis, Indiana 46204  
Telephone (317) 236-1313

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Nancy AMBERGEE Williamson  
Full Name of Sole or First Joint Inventor

United States (US)  
Country of Citizenship

Nancy Williamson  
Inventor's Signature

10/19/01  
Date

8826 Vermont Avenue 80 Lexington Avenue

Connersville, IN 47331 U.S.A. Hagerstown, In 47346 U.S.A.  
Residence and Post Office Address

Thomas BLEASE  
Full Name of Second Joint Inventor

United States (US)  
Country of Citizenship

Thomas R. Blease  
Inventor's Signature

10/19/01  
Date

1176 Aliza Drive

Connersville, IN 47331 U.S.A.  
Residence and Post Office Address

Jeffrey DEVALL  
Full Name of Third Joint Inventor

United States (US)  
Country of Citizenship

Jeffrey E. Deval  
Inventor's Signature

22-10-01  
Date

15 Belmont Abernethy

Gwent NP7 4SN United Kingdom  
Residence and Post Office Address

Dwight SMITH  
Full Name of Fourth Joint Inventor

United States (US)  
Country of Citizenship

Inventor's Signature

Date

P.O. Box 485

30 35977; Mark A. Hamill, Reg. No. 37145; Michael B. Allen, Reg. No. 37582; and Daniel P. Albers, Reg. No. 44008, as attorneys of record with full power of substitution and revocation, to prosecute this application, and to transact all business in the Patent and Trademark Office connected therewith, and I specify that communications regarding the application be directed to:

BARNES & THORNBURG

11 South Meridian Street

Indianapolis, Indiana 46204

Telephone (317) 236-1313

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

1-00 Nancy ~~AMBURGEY~~ Williamson  
Full Name of Sole or First Joint Inventor

Nancy Williamson  
Inventor's Signature

United States (US)

Country of Citizenship

10/19/01  
Date

2825 Vermont Avenue 80 Lexington Avenue

Connersville, IN 47331 U.S.A. Hagerstown, IN 47346 U.S.A. IN  
Residence and Post Office Address

2-00 Thomas BLEASE  
Full Name of Second Joint Inventor

Thomas R. Bleese  
Inventor's Signature

United States (US)

Country of Citizenship

10/19/01  
Date

1176 Alisa Drive

Connersville, IN 47331 U.S.A. IN  
Residence and Post Office Address

3-00 Jeffrey DEVALL  
Full Name of Third Joint Inventor

Inventor's Signature

15 Belmont, Aberquenny

Gwent NP7 5HN United Kingdom GB  
Residence and Post Office Address

United States (US)

Country of Citizenship

Date

4-00 Dwight SMITH  
Full Name of Fourth Joint Inventor

Dwight D. Smith  
Inventor's Signature

United States (US)

Country of Citizenship

11/9/01  
Date

P.O. Box 485

Milton, IN 47357 U.S.A. IN  
Residence and Post Office Address